




## Function instruction..

- Voice active monitoring, when detect voice level higher then voice setting sensitivity, the module will send SMS and making call automatically.
- Can set 4 sensitivity voice level of the microphone for detect voice in the area.
- Can be able turn off the voice detect function through SMS.
- The microphone sensitivity can be set through SMS.
- Internal shock active monitoring, the module will send SMS and making call when detect the internal shock vibration.
- Can be set ON or OFF for shock vibration through SMS.

## Specification..

Network	GSM 900/1800/1900
Power consumption	20mA standby mode, 200mA monitoring mode
Audio Surveillance	-75db
Voice active method	Environment voice filtering, directed human voice sensor.
Shock active method	Internal Shock active sensor.
Device configuration method	Password protected SMS Text message.
Active way	Voice active alert through SMS and call back.
LI-Battery	3. 7Vdc at 900mAh
Dimension	42x33x12 mm (include battery pack)
Charge voltage	5V-6VDC 500mA
Charger input volt	100-240VAC

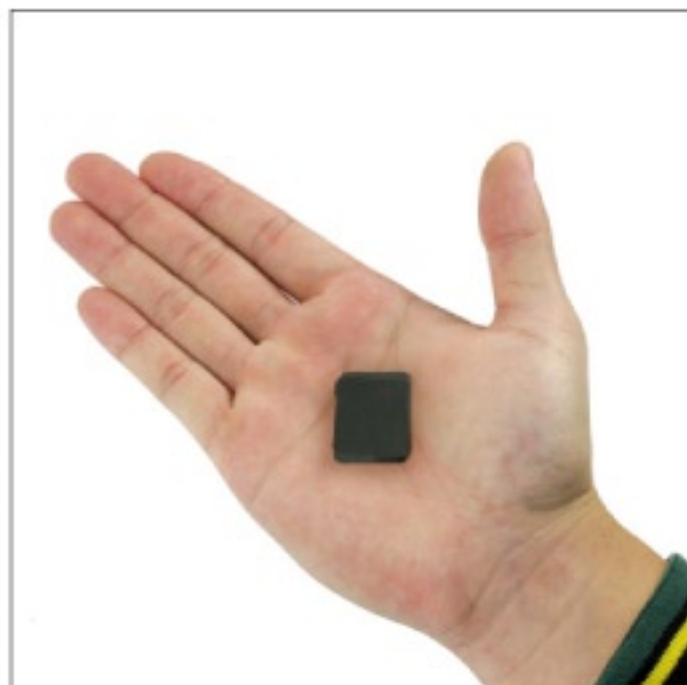

Monitor is not limited by distance, that is, you can monitor anywhere!